


# GC-G8

Powerful cloud server, no worry for the after sales service;  
PC and Printer are in a protected location.



### Standard parts

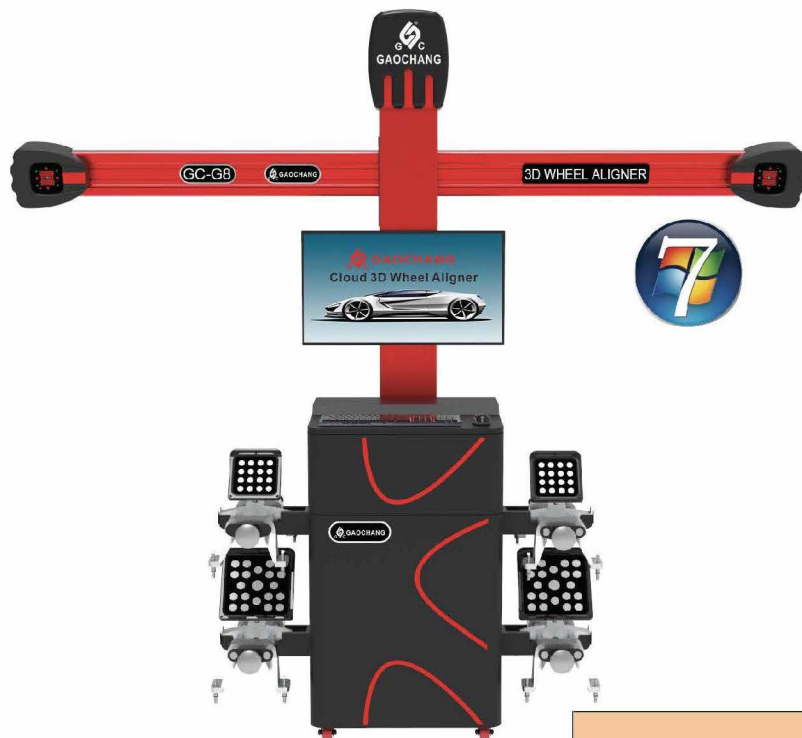

4 clamps



4 target plates




Turntable(400×400×50)



2 Cameras

### Dimension



### Measures

Dimension(mm)	2800×800×2400h
Packing(mm)	(1#) 1070 x 730 x 1180h; (2#) mm 2925 x 490 x 450h
Weight(kg)	gross: 75+75=150kg - net: 50+60=110kg

### Features:

1 Save space, with short distance installation; 2 Real precision 5 million pixels, imported chips, 25 frame/sec., to break the traditional 4 frame/sec.; 3 Target plates apply aviation material, with deformation less than 0.01 which can bear high temperature less than 276℃, with shockproof and waterproof; 4 Available for short moving distance to work more effectively; 5 With cloud remote after sales service function; 6 Software updated in lifetime for free; 7 LCD 32" monitor. 8 With luxury cabinet;

### Technical data

Power supply	200V-240V; 50-60HZ
Power source	Max 500W
Wheel diameter	Cars 10-24"
Measuring accuracy	0,01° 0,1mm
Total Toe	± 10°
Partial toe	± 5°
Camber	± 12°
Caster	± 30°
Lock angle	± 40°
Computer	Industrial Computer Intel
Monitor	32" LCD
External interface	USB
Max. weight on turntables	Car's light duty 750kg / Car's heavy duty 1000kg / Car's heavy duty 3500kg

### Main functions

Total toe
Single toe RG and LH
Thrust angle(Automatic compensation)
Camber
Caster
Direct regulation of caster
King pin (S.A.I.)
Simultaneous adjustment toe
Camber caster
Toe-out-on-turns 10° or 20°
Lock angle (max)
Run-out (Automatic compensation)
Included angle